



Length	1058 mm
Width	680 mm
Height	34 mm
Frame	Aluminum
Weight	8,4 kg

Sunmodule®

SW 70/75/80/85/90 poly RIA

With its Sunmodule® SolarWorld presents a photovoltaic module ideally suitable for both off-grid and small on-grid applications. Highest quality standards are applied in the entire manufacturing process. SolarWorld's in-depth expertise ensures best performance and highest energy yields over the entire lifespan, even under challenging climatic conditions.

The Sunmodule® is particularly used in industrial applications such as powering off-grid telecom or monitoring systems. It also covers a wide range of rural electrification applications in remote areas, e.g. solar home systems, street lighting and many more.

The compact dimensions of the Sunmodule® and the solid workmanship of its aluminum frame allow easy and flexible mounting. The design of the water repellent junction box makes wiring easy and secure. The junction box is equipped with two cable glands and two easy to wire spring-type clamps, so no special tools are needed. This simplifies installation and speeds up the installation process.



We turn sunlight into power.

Sunmodule®

SW 70/75/80/85/90 poly RIA

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

		SW 70	SW 75	SW 80	SW 85	SW 90
Maximum power	P_{max}	70 Wp	75 Wp	80 Wp	85 Wp	90 Wp
Lost motion voltage	U_{oc}	21,3 V	21,5 V	21,7 V	21,9 V	22,1 V
Maximum power point voltage	U_{mpp}	16,5 V	16,8 V	17,1 V	17,4 V	17,7 V
Short-circuit current	I_{sc}	5,30 A	5,34 A	5,38 A	5,42 A	5,46 A
Maximum power point current	I_{mpp}	4,68 A	4,78 A	4,88 A	4,98 A	5,08 A

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/M², NOCT, AM 1.5

		SW 70	SW 75	SW 80	SW 85	SW 90
Maximum power	P_{max}	54,8 Wp	57,2 Wp	59,7 Wp	62,3 Wp	64,9 Wp
Lost motion voltage	U_{oc}	18,9 V	19,1 V	19,4 V	19,7 V	19,9 V
Maximum power point voltage	U_{mpp}	14,6 V	15,0 V	15,3 V	15,6 V	16,0 V
Short-circuit current	I_{sc}	4,27 A	4,30 A	4,33 A	4,37 A	4,40 A
Maximum power point current	I_{mpp}	3,74 A	3,82 A	3,90 A	3,98 A	4,06 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200W/m², 95% (+/-3%) of the STC efficiency (1000 W/m²) is achieved.

COMPONENT MATERIALS

Cells per module	36
Cell type	Poly crystalline
Cell dimensions	104 mm x 156 mm

SYSTEM INTEGRATION PARAMETERS


Maximum system voltage SC II	1000 V
Maximum reverse current	12 A

THERMAL CHARACTERISTICS

NOCT	46 °C
TC I_{sc}	0,034 %/K
TC U_{oc}	-0,34 %/K
TC P_{mpp}	-0,48 %/K

ADDITIONAL DATA

Power tolerance	+/- 5 %
Junction box	IP65
Maximum outer cable diameter	6,9 mm
Maximum wire cross section	4 mm ²

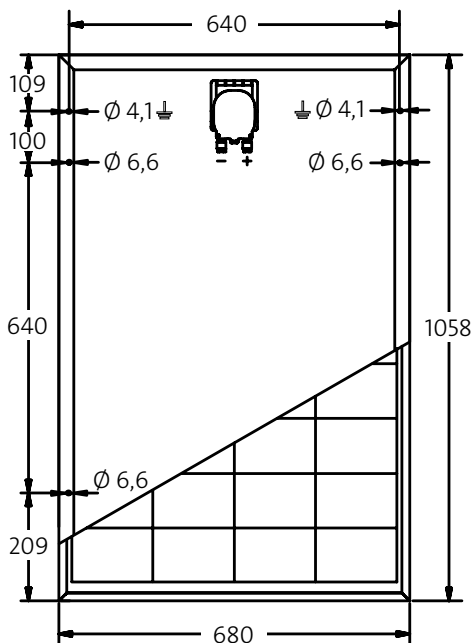

- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection



CORROSIVE GAS (NH₃) RESISTANT